


A
B
C
D
E
F


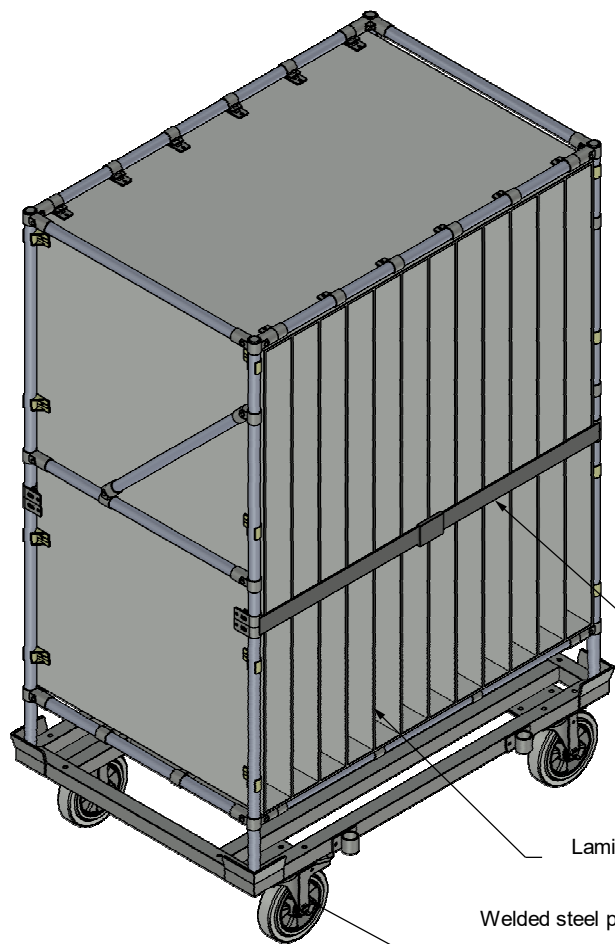


strap with loop on both side

Laminated PP insert with removable bottom in each partition

Welded steel profile chassis, galvanized surface finish.

2x 200mm casters with brake
2x 200mm casters

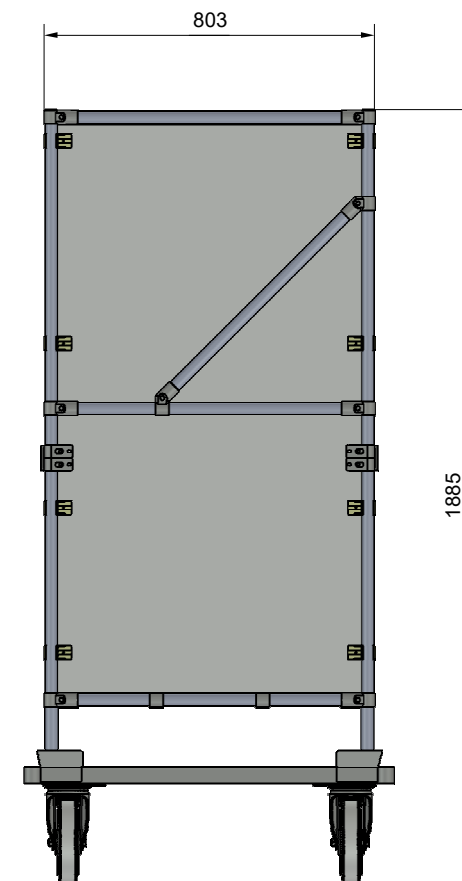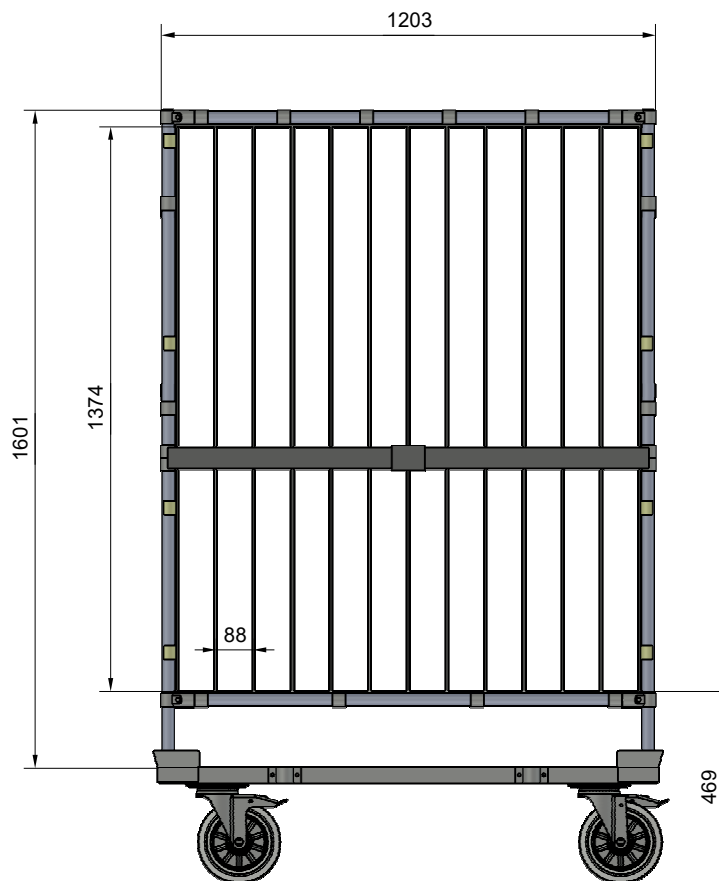

This document is the sole property of Enprag s.r.o. and may not be copied, duplicated, used or given to third parties without the written permission from Enprag s.r.o. Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:
- DIN ISO 2768-2-K
Tolerancing:
- DIN 7167

Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v
-Machining details and finish classification to DIN ISO 1302

	Total load capacity*: 120 kg (Celková nosnosť:*)		Load capacity - floor*: kg (nosnosť na patro:*)		Dat. 24.10.2024	
	Scale	A3	Drawn Vlach	Checked	Sheet 1 of 1	Rev. A00
	Title Trolley				Doc.Nr 24102401	